

Mirror Station®

Basic installation chart of Mirror Station®

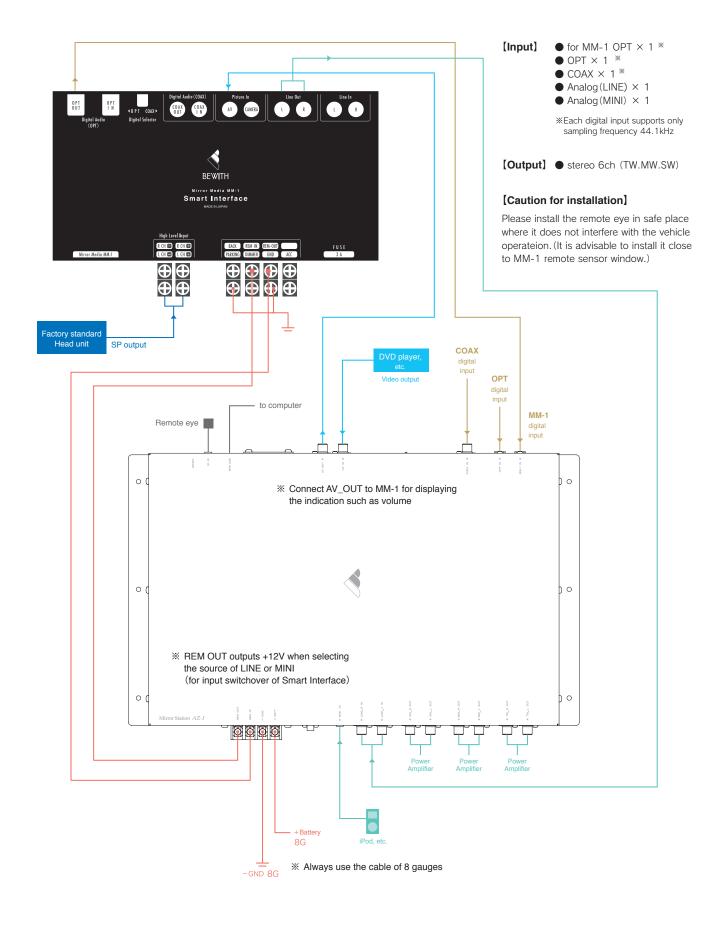


■ Connection to after market audio system (digital out) .1

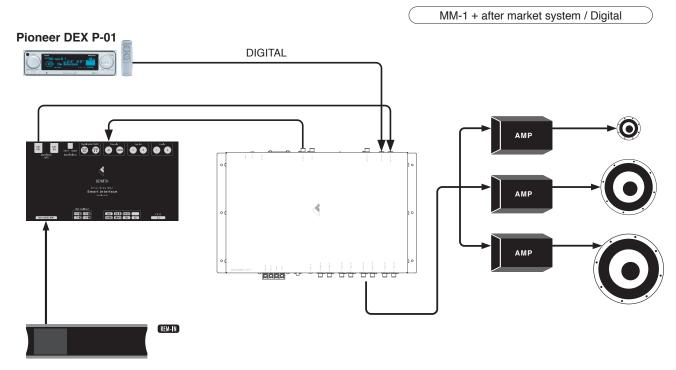

※ Terminal of the cable needs processing to fit on (for AZ-1 OPT2 input) With carrozzeria X serise, digital signal does not output from the head unit unless the processor is connected to IP BUS.


■ Connection to after market audio system(digital out) .2

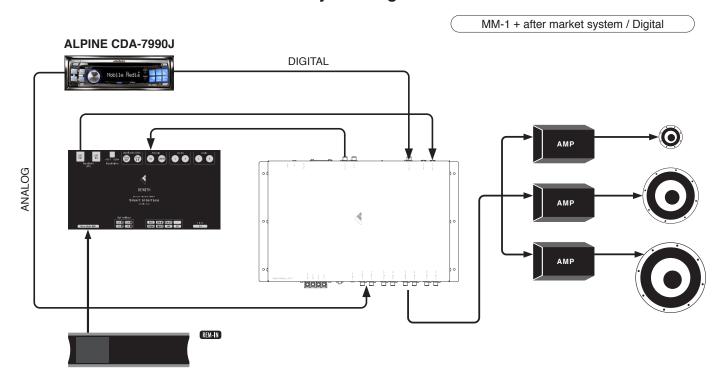

Digital output of ALPINE CDA-7990J is only for CD audio. The audio of the tuner should be inputted in ANALOG. The terminal of COAX input needs processing to fit on. The ANALOG input needs an adapter cable.

■ Connection to after market audio system (analog out) .1

MM-1 + after market system / Analog

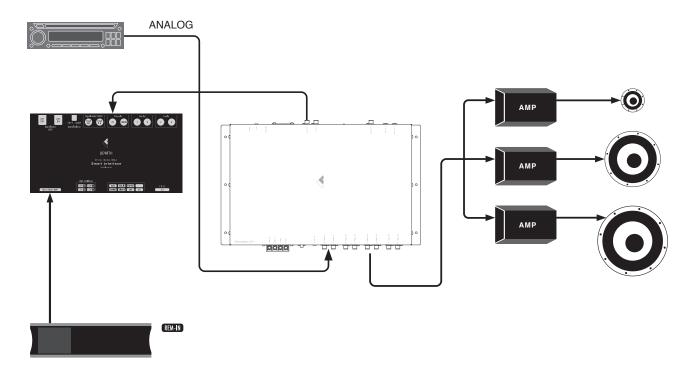

■ Connection to after market audio system(ALPINE F1)

